


NOTES:

1. May be used on rural or urban low volume (≤ 400 ADT) low speed (posted speed ≤ 25 mph) streets.
2. Corner angle shall be 75° to 105°
3. This drawing shows the edge of pavement or traveled way only. Refer to applicable standard for the appropriate edge requirements.
4. Pavement or surfacing section at knuckle shall match required road section.

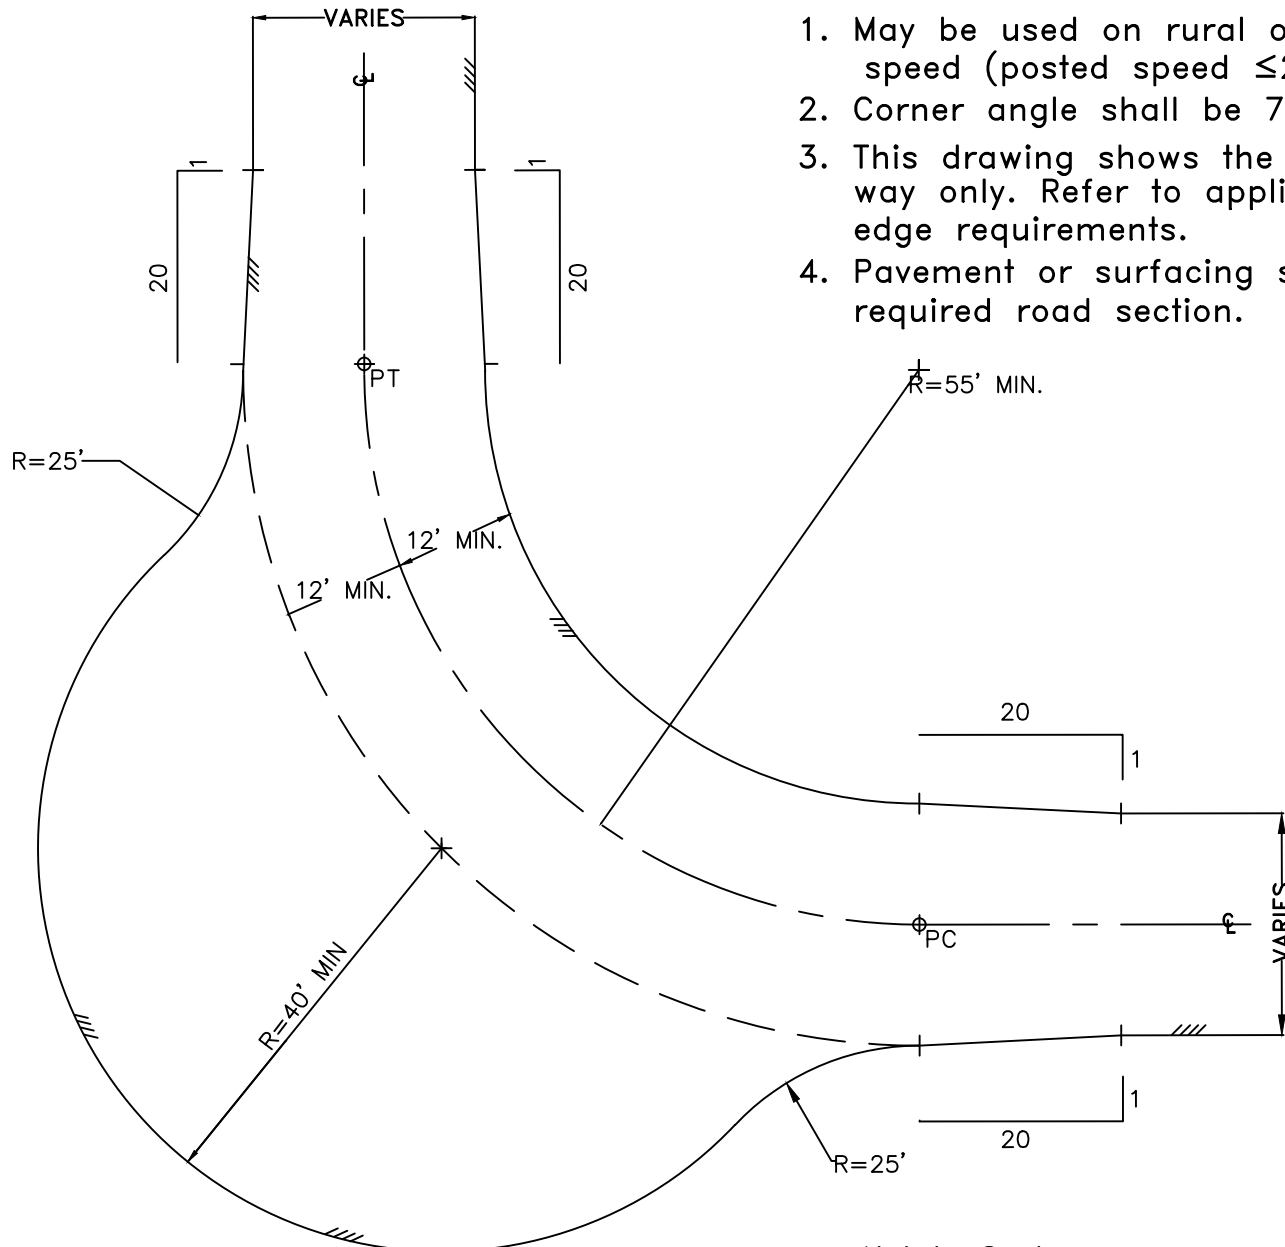

5/17/16

Not to Scale

DRAWING 505.1-2
LOW SPEED, LOW VOLUME CORNER KNUCKLE
WHATCOM COUNTY DEPARTMENT OF PUBLIC WORKS