
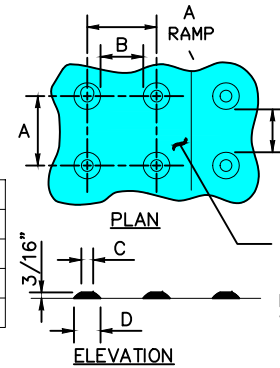
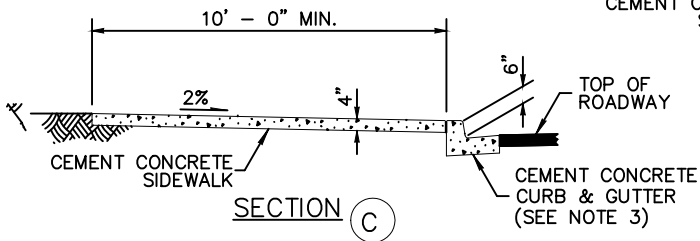
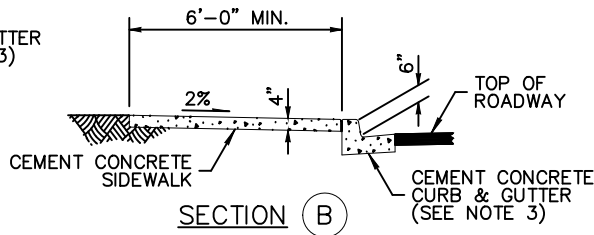


CURB RAMP TYPE 3
PLAN

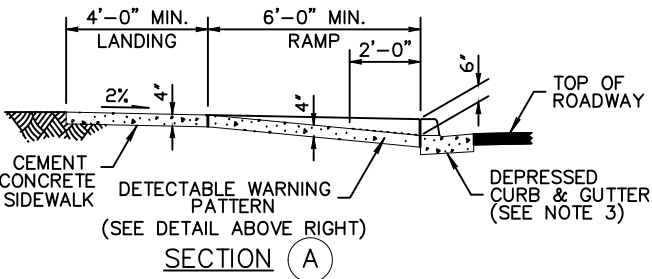

	MIN.	MAX.
A	1 5/8"	2 3/8"
B	5/8"	1 1/2"
C	7/16"	3/4"
D	7/8"	1 7/16"

DETECTABLE WARNING PATTERN AREA SHALL BE YELLOW, IN COMPLIANCE WITH WSDOT STD. PLAN 8-14.3

TRUNCATED DOMES (SEE NOTE 2)
DETECTABLE WARNING PATTERN DETAIL

NOTES

1. FOR USE WITH TWO RAMPS ON SAME RADIUS.
2. AVOID PLACING DRAINAGE STRUCTURE, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF ACCESS AREAS.
3. DETECTABLE WARNING PATTERNS MAY BE CREATED BY ANY METHOD THAT WILL ACHIEVE THE TRUNCATED DOME DIMENSIONS AND SPACING SHOWN.
4. CURB AND GUTTER SHOWN, SEE THE CONSTRUCTION PLANS FOR THE CURB DESIGN SPECIFIED. SEE DRAWING 508.F-1 FOR CURB DETAILS
5. RAMP SLOPES SHALL NOT BE STEEPER THAN 12H.:1V..

SURFACING TEXTURE
DETAIL D

